

Please type a plus sign (+) inside this box [+]

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 42390.P7110

Total Pages 2

First Named Inventor or Application Identifier Jeffrey S. McVeigh

Express Mail Label No. EL034431225US

ADDRESS TO: **Assistant Commissioner for Patents**
Box Patent Application
Washington, D. C. 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. X Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. X Specification (Total Pages ~~32~~ 33)
(preferred arrangement set forth below)
 - Descriptive Title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claims
 - Abstract of the Disclosure
3. X Drawings(s) (35 USC 113) (Total Sheets 10)
4. X Oath or Declaration (Total Pages 3)
 - a. Newly Executed (Original or Copy)
 - b. Copy from a Prior Application (37 CFR 1.63(d))
(for Continuation/Divisional with Box 17 completed) (**Note Box 5 below**)
 - i. **DELETIONS OF INVENTOR(S)** Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. Computer Readable Copy
 - b. Paper Copy (identical to computer copy)
 - c. Statement verifying identity of above copies

065142260

ACCOMPANYING APPLICATION PARTS

8. Assignment Papers (cover sheet & documents(s))
9. a. 37 CFR 3.73(b) Statement (where there is an assignee)
- X b. Power of Attorney
10. English Translation Document (if applicable)
11. a. Information Disclosure Statement (IDS)/PTO-1449
- b. Copies of IDS Citations
12. Preliminary Amendment
13. X Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. a. Small Entity Statement(s)
- b. Statement filed in prior application, Status still proper and desired
15. Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. X Other: Certificate of Mailing (1 page in duplicate)
- _____
- _____
- _____

17. **If a CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

 Continuation Divisional Continuation-in-part (CIP)

of prior application No:

18. **Correspondence Address**

 Customer Number or Bar Code Label _____

(Insert Customer No. or Attach Bar Code Label here)

or

 X Correspondence Address Below

NAME Michael A. Proksch, Reg. No. 43,021

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP

ADDRESS 12400 Wilshire Boulevard

Seventh Floor

CITY Los Angeles STATE California ZIP CODE 90025-1026

Country U.S.A. TELEPHONE (503) 684-6200 FAX (503) 684-3245

Express Mail Label: EL034431225US

APPLICATION FOR UNITED STATES LETTERS PATENT

FOR

**METHOD AND APPARATUS
FOR
SIMPLIFYING FIELD PREDICTION MOTION ESTIMATION**

Inventor: **Jeffrey S. McVeigh
Michael Keith**

Prepared by:

BLAKELY SOKOLOFF TAYLOR & ZAFMAN, LLP
12400 Wilshire Boulevard, 7th Floor
Los Angeles, California 90025
(503) 684-6200

"Express Mail" label number EL034431225US

"Express Mail" mailing label number EL034431225US
Date of Deposit MARCH 22, 1999
I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231
Michael Keith 3-22-99

METHOD AND APPARATUS FOR SIMPLIFYING FIELD PREDICTION MOTION ESTIMATION

BACKGROUND OF THE INVENTION

1. Related Applications

This non-provisional patent application claims priority to provisional application no. 60/080,501 by Jeffrey McVeigh and Michael Keith for a "Method and Apparatus for Providing Real-Time MPEG-2 Image Processing", filed on April 2, 1998; as well as to non-provisional application no. 09/101,251 by Michael Keith for a "Simplified Predictive Video Encoder", filed on December 11, 1998. Each of the foregoing provisional applications are commonly assigned to Intel Corporation of Santa Clara, CA.

2. Field of the Invention

The present invention relates to the field of image processing and, in particular, to a method and apparatus for simplifying field prediction motion estimation facilitating real-time video encoding.

3. Background Information

Over the years, the Motion Picture Experts Group (MPEG) has developed a number of standards for digitally encoding (also commonly referred to as compressing) audio and video data (e.g., the well-known MPEG-1, MPEG-2 and MPEG-4 standards). Recently, particular attention has been drawn to the MPEG-2 standard [ISO/IEC 13818-2:1996(E), "Information technology – Generic coding of moving pictures and associated audio information: Video", 1996], which generally describes a bit-stream syntax and decoding process for broadcast quality digitized video. The MPEG-2 standard is widely used in emerging state-of-the-art video delivery systems

including digital versatile disk (DVD, sometimes referred to as digital video disk), direct broadcast satellite (DBS) (e.g., digital satellite television broadcasts) and high-definition television (HDTV).

The rising popularity of the MPEG-2 standard may well be attributed to its complex video compression technology that facilitates the broadcast quality video. Compression is basically a process by which the information content of an image or group of images (also referred to as a Group of Pictures, or GOP) is reduced by exploiting the spatial and temporal redundancy present in and among the image frames comprising the video signal. This exploitation is accomplished by analyzing the statistical predictability of the signal to identify and reduce the spatial and temporal redundancies, thereby reducing the amount of storage and bandwidth required for the compressed data. The MPEG-2 standard provides for efficient compression of both interlaced and progressive video content at bit rates ranging from 4 Mbps (for DVD applications) to 19Mbps (for HDTV applications). **Figure 1** illustrates a block diagram of the complex elements of an example prior art MPEG-2 encoder for compressing video data.

As shown in the block diagram of **Fig. 1**, encoder **100** is generally comprised of an intra-frame encoder **102**, an inter-frame encoder **104** a multiplexer **106** and a buffer **108**, which controls the rate of broadcast of the compressed video data. Each of the intra-frame encoder **102** and inter-frame encoder **104** will be described in turn, below.

Simplistically speaking, compression by intra-frame compressor **102** may be thought of as a three-step process wherein spatial redundancy within a received video frame is identified, the frame is quantized and subsequently entropy encoded to reduce or eliminate the spatial

redundancy in the encoded representation of the received frame. The identification of spatial redundancy within a frame is performed by transforming spatial amplitude data of the frame into a spatial frequency representation of the frame using the discrete cosine transform (DCT) function **110**. The DCT function is performed on 8x8 pixel "blocks" of luminance (brightness) samples and the corresponding blocks of chrominance (color differential) samples of the two-dimensional image, generating a table of 64 DCT coefficients. The block of DCT coefficients is then compressed through Quantizer (Q) **112**. Quantization is merely the process of reducing the number of bits required to represent each of the DCT coefficients. The quantizing "scale" used can be varied on macroblock (16x16 pixel) basis. The quantized DCT coefficients are then translated into a one-dimensional array for encoding **114** via variable length encoding and run length encoding. The order in which the quantized DCT coefficients are scanned into encoder **114** affects the efficiency of the encoding process. In general, two patterns for scanning the block of quantized DCT coefficients are recognized, the zigzag pattern and the alternate scan pattern, each of which are depicted in **Figure 2** as pattern **200** and **250**, respectively. Those skilled in the art will appreciate that with prior art intra-frame compression such as that employed by intra-frame encoder **102**, the zigzag scan pattern **200** is typically used as it produces long runs of zeroes, as the block of DCT coefficients are transformed run-length/value pairs for the variable length encoding process. The quantized, entropy encoded DCT coefficients along with the quantization tables are then sent to MUX **106** for broadcast and/or storage through rate control buffer **108**.

Inter-frame compressor **104** reduces the temporal redundancies existing between frames in a group of pictures and is typically a complex process of motion estimation between frames

and fields of the frames using reconstructed past and predicted future frames as a reference.

Accordingly, inter-frame compressor **104** is depicted comprising motion estimator **116** which statistically computes motion vectors to anticipate scene changes between frames, anchor frame storage **118** to store reconstructed prior frame data (from the quantized DCT coefficients) and predicted frame storage **120** to store a predicted future frame based on information received from motion estimator **116** and current frame information. In addition, inter-frame compressor **104** is depicted comprising inverse quantizer **122**, inverse DCT **124** and a summing node **126** to reconstruct the present or past frames for storage in anchor frame storage **118**.

Those skilled in the art will appreciate that the MPEG-2 standard provides for three types of video frames and that the type of frame determines how the motion estimation for that frame is to be accomplished. The three frame types are Intra-frame coded (I-frame), Predictably encoded frames (P-frame) and bidirectionally interpolated frames (B-frame). I-frames are encoded based only on the content within the frame itself and are typically used as reference and synchronization frames. That is, the separation between I-frames is used to denote Groups of Pictures (GOPs). P-frames are encoded based on the immediate past I- or P-frames (also referred to as anchors), and B-frames are encoded based on past or future I- and P-frames (thus the need for anchor and predicted frame storage **118** and **120**, respectively). Predicting content based on frame data is graphically illustrated with reference to **Figure 3**.

Turning to **Figure 3**, a graphical representation of a typical GOP sequence of frames is presented **300** denoting an IBBPBBI sequence (commonly referred to as a GOP (6,3) sequence by those skilled in the art). As shown in **Fig. 3**, encoding of I-frame **302** does not rely on any

prior or future frame. Encoding of B-frame **304** utilizes information from past frames (e.g., I-frame **302**) as well as future I and/or P-frames (e.g., P-frame **306**).

If the frame sequence contains interlaced content, field prediction is also performed in calculating the motion vector. Simplistically speaking, frames are broken into even and odd fields, and the content of each field is predicted based on the information contained in both the odd and the even fields of the past and/or future frames (depending on the frame type, P or B-frames, respectively). More specifically, the content of P- and B-frames are predicted by analyzing the even and odd fields of past and/or future anchor frames. A typical field prediction process is depicted in **Figure 4**.

With reference to **Figure 4**, two frames **402** and **410** are depicted broken into their constituent even (**404** and **412**) and odd (**406** and **414**) fields, respectively. In this example, frame **402** is an I-frame, while frame **410** is a B-frame. In accordance with the prior art, the even field **412** of B-frame **410** is predicted from the even **404** and odd **406** field of the prior I-frame **402**.

Those skilled in the art will appreciate that, although the computationally intensive video encoding associated with the MPEG-2 standard provides high resolution video imagery, its implementation typically requires one or more powerful, dedicated processor(s) (e.g., a microcontroller, an application specific integrated circuit (ASIC), a digital signal processor (DSP) and the like) to encode (or, conversely decode) MPEG-2 standard video data (e.g., to/from a DVD disk). Attempts to utilize the general purpose central processing unit (CPU) of a typical home computer for MPEG-2 processing has proven computationally prohibitive, as the MPEG-2 standard processing consumed nearly all of the computational resources of the general purpose

CPU, thereby rendering the computer virtually useless for any other purpose. As a consequence, providing MPEG-2 standard video technology in a personal computer has heretofore required the addition of the costly dedicated video processors described above.

As a result of the cost and performance limitations commonly associated with real-time video encoding described above, the roll-out of MPEG-2 video multimedia capability in the home computing market has been slowed. Consequently, a need exists for encoding enhancements to facilitate real-time video encoding that is unencumbered by the deficiencies and limitations commonly associated with the prior art. An innovative solution to the problems commonly associated with the prior art is provided herein.

662200 "2974260

SUMMARY OF THE INVENTION

In accordance with the teachings of the present invention, a method and apparatus for simplifying field prediction motion estimation is presented. In particular, in accordance with one embodiment of the present invention, motion estimation on a received stream of data comprising at least a predicted frame and an anchor frame, and utilizing even-parity field prediction to predict content of each of a plurality of fields of the predicted frame from corresponding fields of the anchor frame.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described by way of exemplary embodiments, but not limitations, illustrated in the accompanying drawings in which like references denote similar elements, and in which:

5 **Figure 1** is a block diagram illustration of a typical prior art data encoder to encode data in accordance with the MPEG-2 standard;

Figure 2 is a graphical representation of a block of data being encoded in accordance with a zigzag scan pattern, and a block of data being encoded in accordance with an alternate scan pattern, in accordance with one embodiment of the present invention;

10 **Figure 3** is a graphical representation of a group of pictures denoting the coding dependencies for motion estimation, in accordance with prior art encoders;

Figure 4 is a graphical representation of field prediction dependencies between frames of a group of pictures, in accordance with prior art encoders;

15 **Figure 5** is flow chart illustrating an example method for intra-frame encoding in accordance with the teachings of the present invention;

Figure 6 is a flow chart illustrating a method of performing virtual half-resolution (VHR) filtering in accordance with one aspect of the present invention;

20 **Figure 7** is a graphical representation of a received block of data before and after application of the VHR filter of the present invention, in accordance with the teachings of the present invention;

Figure 8 is a flow chart of an example method of performing inter-frame encoding, in accordance with the teachings of the present invention;

25 **Figure 9** is a flow chart of an example method for performing unidirectional motion estimation on bi-directionally predicted frames, in accordance with another aspect of the present invention;

Figure 10 is a graphical representation of motion estimation for a group of pictures in accordance with the teachings of the present invention;

Figure 11 is a flow chart illustrating an example method for performing even-parity field prediction in accordance with another aspect of the present invention;

5 **Figure 12** is a graphical representation of motion estimation using even-parity field prediction in accordance with the teachings of the present invention;

Figure 13 is a block diagram of an example software architecture incorporating the teachings of the present invention, in accordance with one embodiment of the present invention;

10 **Figure 14** is a block diagram of an example software architecture incorporating the teachings of the present invention, in accordance with an alternate embodiment of the present invention; and

Figure 15 is a block diagram of an example storage medium having stored therein a plurality of machine executable instruction which, when executed, implement the teachings of the present invention, in accordance with one embodiment of the present invention.

15

DETAILED DESCRIPTION

In the following description, for purposes of explanation, specific numbers, materials and configurations are set forth in order to provide a thorough understanding of the present invention.

5 However, it will be apparent to one skilled in the art that the present invention may be practiced without the specific details. In other instances, well known features are omitted or simplified in order not to obscure the present invention. Furthermore, for ease of understanding, certain method steps are delineated as separate blocks, however, those skilled in the art will appreciate that such separately delineated blocks should not be construed as necessarily conferring an order
10 dependency in their performance.

Reference in the specification to “one embodiment” or “an embodiment” means that a particular feature, structure or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, the appearances of the phrase
15 “in one embodiment” appearing in various places throughout the specification are not necessarily all referring to the same embodiment.

Those skilled in the art will appreciate from the description to follow that the innovative encoder described herein is comprised of a number of innovative aspects, each of which provide increased performance without significant degradation to the integrity of the encoded data over
prior art MPEG-2 video encoders. For ease of explanation, each of the innovative aspects of
20 intra-frame encoding and inter-frame encoding processes of the present invention will be described in turn, and as a constituent component of the innovative encoder of the present invention. This is not to say, however, that all of the innovative aspects described herein must be present in order to practice the present invention. Indeed, a number of alternative embodiments will be presented

depicting various levels of complexity incorporating one or more aspects of the present invention. Thus, those skilled in the art will appreciate from the description to follow that any of a number of embodiments of the present invention may be practiced without departing from the spirit and scope of the present invention.

5 **Intra-frame Encoding**

Turning to **Figure 5**, a flow chart illustrating an example method for performing intra-frame compression and encoding in accordance with the teachings of the present invention is presented. In accordance the teachings of the present invention, method **500** begins with, in step **502**, a determination of whether virtual half-resolution (VHR) downconversion is to be performed, in accordance with a first aspect of the present invention. If VHR downconversion is not to be performed, the innovative encoder of the present invention will continue with prior art intra-frame compression, while still employing the innovative inter-frame compression aspects of the present invention to be described more fully below, step **504**.

If, however, it is determined in step **502** that VHR downconversion is to be performed, the process continues with step **506** wherein a low-pass filter is applied to the received frame in step **506** and the frame is subsampled horizontally. In one embodiment of the present invention, for example, the frame is subsampled horizontally by a factor of two (2), which eliminates one-half of the frame of data. Turning briefly to **Figures 6 and 7**, one example embodiment of a method for performing VHR downconversion and a block of DCT coefficient data before and after VHR downconversion is presented. In accordance with one aspect of the present invention, VHR downconversion begins with step **602** wherein a block of data **700** (e.g., 8x8 block of DCT coefficients) is received and processed through a low-pass filter. In step **604**, the filtered block of

data is horizontally subsampled by some scaling factor. In one embodiment, the filtered block of data is horizontally subsampled by a factor of two (2), rendering the right-half of the block null (i.e., full of zeroes). More specifically, in accordance with the teachings of the present invention, VHR downconversion is performed by application of a horizontal low-pass filter, which is applied to both the luminance and chrominance data. In one embodiment of the present invention, a [1 2 1] filter kernel is used in step 602. For example, in one embodiment, the following filter is used:

$$h(n) = 0.25[\delta(n-1) + 2\delta(n) + \delta(n+1)] \quad (1)$$

In one example software implementation of the present invention, suitable for execution by an Intel® Architecture processor, the following simplified version of equation (1) may be used, utilizing the *pavg* instruction:

$$y(n) = PAVG(x(n), PAVG(x(n-1), x(n+1))) \quad (2)$$

Thus, instead of subsequently encoding the received data with a traditional 8x8 DCT and then realizing that most of the coefficients in the right half of the block, i.e., the high-frequency spatial components, are zero as a result of the foregoing filter, the block is horizontally subsampled in step 604. In one embodiment, for example, the received blocks are subsampled by a factor of two (2) horizontally. This results in macroblocks of 8x16 and blocks of 4x8. That is, the horizontal 8-pixel DCT is replaced with a modified 4-pixel DCT. The resulting coefficients of the normal 4-pixel DCT are modified by scaling them by the square root of two (sqrt (2)) to accommodate the conversion to an 8-pixel DCT block. Consequently, to an MPEG-2 compliant decoder, the VHR compressed data looks identical to full-resolution encoded MPEG-2 data. When decoded with an MPEG-2 compliant decoder, the visual effect of application of the VHR

downconversion of **Figure 6** is negligible, while realizing up to a 2X improvement in data throughput.

Once the VHR downconversion has been completed on each block of the received frame in step **506**, discrete cosine tranform (DCT) and quantization pre-processing is performed on the VHR downconverted frame, step **508**. More specifically, in accordance with one embodiment of the present invention, the pre-processing consists of DCT type selection and macroblock quantization selection.

For data streams comprising interlaced video, the first step in the encoding pipeline is deciding between frame and field DCT. To improve compression efficiency, selection of the DCT type which yields smaller vertical high-frequency coefficients is preferable. In one embodiment present invention, the “vertical activity” is measured by comparing the activity of adjacent lines for both frame and field macroblocks. In one embodiment, vertical frame activity is measured by summing the absolute difference of spatial amplitudes over pairs of adjacent frame lines over a macroblock (i.e., VHR mode 8x16; non-VHR mode 16x16). In one embodiment, a *psad* operation may be used to sum the absolute difference of pairs and, thus, vertical frame activity is calculated by summing the result of a *psad* operation over pairs of adjacent frame lines over the macroblock, e.g.,

$$frame_activity = \sum_{n=0}^7 PSAD(line_{2n}, line_{2n+1}) \quad (3)$$

Similarly, the vertical field activity for both fields is calculated by summing the absolute difference over pairs of adjacent field lines (even numbered lines contain the top field and the odd numbered lines contain the bottom field). Again, the *psad* operation may well be employed, e.g.,

$$field_activity = \sum_{n=0}^3 PSAD(line_{2n}, line_{2n+1}) + \sum_{m=0}^3 PSAD(line_{2m+1}, line_{2m+3}) \quad (4)$$

Low activity values indicate small vertical frequency magnitudes, while the converse is true for high activity values. In accordance with one embodiment of the present invention, the measure which provides the lowest vertical AC coefficients are selected to improve the efficiency of subsequent encoding processes.

In one embodiment of the present invention, the quantizer scale is selected based, at least in part, on how highly correlated the data is within each of the blocks of the macroblock. In one embodiment, if the block data is highly correlated, a lower (finer) quantization scale is used. If, however, the block data is uncorrelated (e.g., highly textured regions), a larger quantizer scale is utilized. This decision is based, in part, on the theory that the human visual system is not particularly sensitive to degenerative artifacts in highly textured regions. To estimate the activity within a macroblock, a measure of the horizontal activity is combined with a measure of the vertical activity value obtained from the DCT type selection (above). In one embodiment, the horizontal activity is measured using a first-order approximation of the correlation between adjacent pixels using the *psad* operation:

$$horizontal_activity = \sum PSAD(line[n] \& 0x00ffffffffffff, line[n] >> 8) \quad (5)$$

The total activity, which is the sum of the horizontal and vertical activities, then is used to select the macroblock quantizer scale to be applied.

Once the pre-processing of step 508 is completed, the VHR downconverted frame is discrete cosine transformed into the frequency domain, step 510. As provided above, the DCT is but one means of transforming the spatial amplitude data of a frame to a spatial frequency

representation. Within the context of the present invention, any of a number of known techniques for performing DCT may well be employed. However, in the instance where the VHR filter has been employed, the transformation to the frequency domain need only be performed on the lower frequency 4x8 pixels of the block (i.e., the left half of the 8x8 block). In one embodiment, the well known fast DCT-SQ algorithm is utilized for eight and four pixel DCT's.

With continued reference to **Figure 5**, the downconverted, DCT coefficients resulting from the DCT process of step **508** are quantized in step **512**, before entropy encoding in block **514**. In accordance with one embodiment of the present invention, only the left-side, i.e., the low-frequency components, of the DCT transformed block are quantized, thereby increasing throughput by a factor of two.

As described above, the entropy encoding process **514** translates the two-dimensional block of quantized DCT coefficients into a one dimensional representation. Since the quantized DCT coefficients in the right half of the 8x8 block are always zero, as a result of the VHR downconversion, the alternate scan pattern **250** (described above) and run length encoding provides the most efficient entropy encoding process. That is because application of the alternate scan pattern **250** guarantees that almost the entire left half of the block is traversed before traversing the right half. In one embodiment, the run-length encoding process compresses the quantized data further into a form of (*run_of_zeroes, next non-zero value*). For example, a sequence of "070003000002" would be encoded as (1,7),(3,3),(5,2) and so on. As provided above, the goal is to maximize the run of zeroes for maximum compression efficiency.

Those skilled in the art will appreciate, based on the foregoing, that the VHR method of **Figure 6** facilitates up to a 2x improvement in intra-frame compression by replacing the right-half of the received blocks with zeroes, thereby eliminating the need for DCT and quantization of nearly 50% of the received data, while improving encoding efficiency. Thus, those skilled in the art will appreciate that the VHR aspect of the present invention provides for high-quality video while increasing data throughput through the innovative encoder of the present invention.

Inter-frame Compression/Encoding

Having described the innovative intra-frame compression process above with reference to **Figures 5** through **7**, the innovative inter-frame compression process will now be described with reference to **Figures 8** through **12**. Those skilled in the art will appreciate, that the innovative frame prediction and field prediction motion estimation aspects of the present invention, to be described more fully below, facilitate the additional processing speed improvements associated with the present invention. More specifically, disclosed herein is an innovative temporally constrained, unidirectional interpolation of bidirectional interpolated frames motion estimation technique, and an innovative even-parity field prediction motion estimation technique, each of which will be described in greater detail below. We begin with reference to **Figure 8** which presents an example method for removing temporal redundancies between frames (i.e., inter-frame compression) is presented, in accordance with one embodiment of the present invention.

As shown, inter-frame compression process **800** begins upon the receipt of one or more frames of video. In the instance where more than one frame of video is received, they are classified in step **801** as either I-, B-, or P- frames, as described above. In accordance with one embodiment of the present invention, the assignment of frame type follows a predetermined

sequential pattern to achieve the desired GOP sequence, to be described more fully below. In an alternate embodiment, the received frames are buffered and analyzed to determine whether a scene change occurs within any of the buffered frames. If so, the scene change will be placed between two inter-frame encoded frames, e.g., two B-frames, to maximize coding efficiencies and motion estimation of the B-frames (to be described more fully below).

In accordance with one aspect of the present invention, the innovative encoding process of the present invention utilizes a constrained GOP sequence of GOP (3,3), i.e., 3 frames separating I-frames, with a maximum of 3 frames separating anchor frames. By limiting the inter-frame encoding to the GOP structure identified, the innovative encoder of the present invention provides fast access to particularly fine quantities of video (e.g., facilitating editing, post-production, etc.). Moreover, the constrained GOP structure of the present invention facilitates motion estimation by limiting the number of frames which must undergo motion estimation.

In step **802**, a decision is made of whether VHR downconversion is to be performed. If not, the process continues with step **806** offering the innovative frame-prediction and field prediction aspects of the inter-frame compression process. If VHR downconversion is to be performed, the VHR filter (see, e.g., **Figure 6**) is applied in step **804**, and the process continues with motion estimation in step **806**. Those skilled in the art will appreciate, based on the foregoing, that the VHR method of **Figure 6** facilitates up to a 2x improvement in inter-frame compression by replacing the right-half of the received blocks with zeroes, thereby eliminating the need for DCT and quantization of nearly 50% of the received data, while improving encoding efficiency. Thus, those skilled in the art will appreciate that the VHR aspect of the present

invention provides for high-quality video, while reducing encoding complexity thereby enabling the real-time video encoding of the present invention.

The motion estimation step **806** calculates motion vectors which are stored/broadcast along with the compressed video data to facilitate broadcast quality decoding. As described above, motion estimation may well be performed on a frame- or field-basis. In accordance with one aspect of the present invention, the motion estimation of step **806** is comprised of an innovative frame-based motion estimation technique and/or an innovative even-parity field prediction motion estimation technique. With reference to the first of these two aspects of the present invention, an innovative unidirectional interpolated B-frame prediction technique is described more fully with reference to **Figures 9 and 10**.

Turning briefly to **Figure 9** an innovative method for performing temporally constrained, unidirectional B-frame motion estimation **900** is presented. In accordance with the illustrated example embodiment, the method begins upon receipt of a B-frame which is to be inter-frame encoded, step **902**. In step **904**, a single anchor frame is selected from which the content of the B-frame is to be predicted. In accordance with one embodiment of the present invention, the temporally closest anchor frame, whether preceding or superseding the B-frame is selected. In step **906**, in contradiction to the well established method for predicting B-frame content, the content of the B-frame is unidirectionally interpolated from the content of the above identified temporally closest anchor frame, in accordance with one aspect of the present invention. More specifically, in accordance with one embodiment of the present invention, the content of the B-frame is unidirectionally interpolated using the content of the temporally closest anchor frame and a motion vector calculated based on the temporally closest anchor frame. In one

embodiment, the motion vector is the sum of absolute differences (SAD) of the activity within the anchor frame, e.g., within each scan line of the anchor frame.

Graphically, the temporally constrained, unidirectional interpolation of a B-frame is presented with reference to **Figure 10**. As shown in **Figure 10**, rather than bidirectionally interpolating the content of B-frame **1004** from past and future anchor frames, the content of B-frame **1004** is unidirectionally interpolated by the closest anchor frame, i.e., I-frame **1002**, in accordance with one aspect of the present invention. Similarly, B-frame **1006** is unidirectionally interpolated from the temporally closest anchor frame, P-frame **1008**, in accordance with this aspect of the present invention. As shown, inter-frame encoding of P-frame **1008** is premised on the nearest past anchor frame, in this example, I-frame **1002**.

Although contrary to the well established practice for predicting B-frame content, the innovative temporally constrained, unidirectional B-frame technique of **Figure 9** has been empirically shown to provide substantially the same quality decoded picture as video encoded using the standard B-frame encoding process, while using only a fraction of the normal computational requirements. Accordingly, those skilled in the art will appreciate, based on the foregoing, that this aspect of the present invention, namely, the temporally constrained unidirectional interpolation of B-frames greatly reduces the computation complexity of inter-frame compression, thereby facilitating greater encoding throughput with minimal degradation to the quality of the encoded data.

In addition to the innovative frame-based motion estimation technique described above with reference to **Figures 9** and **10**, innovative motion estimation process **806** also includes an enhanced field prediction process, namely, an innovative even-parity field prediction motion

estimation technique. In accordance with this aspect of the present invention, attention is drawn to **Figures 11 and 12**, wherein a method and graphical representation for performing even-parity field motion estimation is presented.

Turning to **Figure 11**, an example method for performing even-parity field prediction is presented, in accordance with one aspect of the present invention. As shown in **Figure 11**, the method begins upon the receipt of a subject frame of interlaced (or progressive) video which is to be inter-frame encoded, step **1102**. In step **1104**, each of a plurality of fields of a past or future (i.e., the temporally closest anchor frame, as described above) anchor frame are analyzed to predict the content of corresponding fields in the subject frame, step **1106**. In one embodiment, the even-field of the anchor frame is used to predict the even-field of a subject frame, while an odd-field of an anchor frame is used to predict the odd-field of the subject frame. In one embodiment, the odd-field of an anchor frame is used to predict the even-field of a subject frame, while the even-field of the anchor frame is used to predict the odd-field of the subject frame. In one embodiment, the content of the even- or odd-field of the anchor frame is scaled by a motion vector to predict the content of corresponding even- or odd-fields of the subject frame. In one embodiment, the motion vector is computed by measuring the sum of absolute differences of the activity within the respective field of the anchor frame.

Graphically, the even-parity field prediction process is presented with reference to **Figure 12**. As shown in **Figure 12**, two frames are presented an I-frame **1302** and a subsequent B-frame **1308**. In accordance with the even-parity field prediction process of the present invention, the even field **1310** of B-frame **1308** is predicted from the corresponding even field **1304** of the temporally closest reference frame, i.e., I-frame **1302** in this example. Similarly, the odd field

1312 of B-frame 1308 is inter-frame encoded based on the content of the odd field 1306 of reference frame 1302. In an alternate embodiment, odd-parity field prediction may well be used, wherein the even field of the subject frame is inter-frame encoded based on the content of the odd field of the reference frame, and vice versa.

5 Although contrary to the well established practice of field prediction used to encode video data, the innovative even-parity field prediction technique has been empirically shown to encode data which, when decoded in accordance with the MPEG-2 standard, provides substantially similar results to the comprehensive field prediction technique of the prior art. Accordingly, those skilled in the art will appreciate that the innovative frame and field prediction techniques
10 presented above, greatly reduce the complexity of motion estimation, facilitating greater encoder throughput while retaining the required and expected video integrity of the MPEG-2 encoded data.

In one embodiment, except for the innovative frame and field prediction constraints described above, motion estimation in accordance with prior art MPEG-2 encoders is performed,
15 albeit at a greatly increased rate due to the innovative constraints. In alternate embodiments, process enhancements to the motion estimation process can be made by multi-resolution decomposition (also referred to as hierarchical decomposition) of the received video into two or more levels, and performing coarse motion estimation on certain levels, while performing fine motion estimation on other levels.

20 Once motion estimation step 806 is complete, coding decisions of whether intra- or inter-frame encoding is required are performed, step 810. In accordance with one embodiment of the present invention, the vertical and horizontal activity measures described above are utilized in

step 806 to determine whether intra- or inter-frame encoding is more suitable. In one embodiment of the present invention, intra-frame encoding is performed per the innovative method of **Figure 5**, step 812. If inter-frame encoding is to be performed (i.e., B- or P- frames), the block difference is calculated, step 814. The block difference is the residual between the original and motion compensated blocks, for both the luminance and chrominance data in the block. In one embodiment, this residual is calculated only over even-numbered lines to reduce computational complexity.

Once the block residual is calculated in step 814, a determination of whether the block is empty can be made, step 816. If so, further determinations of whether the end of the macro-block or frame has been reached in steps 820 and 822, before the encoding process is complete. If, however, the block is not empty, the block is inter-frame encoded (DCT, quantization, entropy encoding, etc.) per **Figure 5** is performed in step 818.

Having described the innovative intra-frame and inter-frame compression and encoding techniques of the present invention, above, some alternate embodiments for the present invention will be presented with reference to **Figures 13** through **15**.

Turning to **Figure 13**, a block diagram of an example software architecture **1400** implemented on an electronic appliance incorporating the teachings of the present invention is presented, in accordance with one embodiment of the present invention. In accordance with the illustrated example embodiment of **Figure 13**, software architecture **1400** is shown comprising a plurality of applications **1402** including a video encoder application **1404**, operating system **1406** with associated device drivers and dynamic link libraries (DLL) **1406**, cooperatively coupled as depicted. In accordance with one embodiment of the present invention, the

innovative elements of intra-frame compressor/encoder **500** and inter-frame compressor/encoder **800** are embodied within distinct DLL's **1408**, which can be called by any of a number of applications **1402**, including the video encoder application **1404**.

In accordance with this example embodiment, DLL's **1408** include a VHR filter DLL **1410**, a frame motion estimation DLL **1412** and, and a field motion estimation DLL **1414** each incorporating the teachings of the present invention described above with reference to **Figures 5-12**. In an alternate embodiment, video encoder application **1404** includes the innovative aspects of intra-frame encoder **500** and inter-frame encoder **800**, described above, as sub-routines within the application itself.

Whether resident within a stand-alone application (e.g., video encoder **1404**) or as a number of discrete DLL's **1408** which are called when required, the innovative aspects of the present invention are embodied as a plurality of executable instructions which, when executed by an appropriate processor/controller, implement the methods of **Figures 5** and/or **8** and their referenced progeny enabling the innovative MPEG-2 encoder technique presented above.

In accordance with the teachings of the present invention, VHR filter DLL **1410** downconverts the received block of data by a factor of two by replacing the data in the right half of the received block with all zeroes (see, e.g., **Fig. 7**). The frame motion estimation DLL **1412** employs the innovative temporally constrained unidirectionally interpolated B-frame technique described above with reference to **Figure 9**. The field motion estimation DLL **1414** employs the

innovative even-parity field prediction technique described above with reference to **Figure 11**.

In alternate embodiments of the present invention, one or more of the innovative aspects of the present invention are provided within the DLL library **1408** or within video encoder application

1404 facilitating the use of encoders with different levels of computational complexity with minimal differentiation in the integrity of the encoded data.

As depicted herein, applications **1402** are intended to represent any of a number of specialty applications known in the art which are executable by an electronic appliance.

5 Similarly, except for the teachings of the present invention, operating system **1406** is also intended to represent any of a number of alternative general operating systems and device drivers known in the art. Those skilled in the art will appreciate that the execution of operating system **1406** is initiated from within a basic input/output system (BIOS) (not shown). Operating system **1406** is a general software service which provides an interface between applications **1402**, a
10 video encoder application **1404** and , the DLL's **1408** incorporating the teachings of the present invention, described above. According to one embodiment of the present invention, operating system **912** is the Windows™ 95 operating system, available from Microsoft Corporation of Redmond, Washington. However, it is to be appreciated that the present invention may be used with any other conventional operating system, such as other versions of Microsoft Windows™
15 (for example, Windows™ 3.0, Windows™ 3.1, Windows™ NT, or Windows™ CE), Microsoft DOS, OS/2, available from International Business Machines Corporation of Armonk, New York, the Apple Macintosh Operating System, available from Apple Computer Incorporated of Cupertino, California, the NeXTSTEP® operating system available from Apple Computer Incorporated, the UNIX operating system, available from Santa Cruz Operations of Santa Cruz,
20 California, the Be operating system from Be, Inc. of Menlo Park, California, and the LINUX operating system.

Turning to **Figure 14**, a block diagram of an example data encoder incorporating the teachings of the present invention is presented. In accordance with the teachings of the present invention, encoder **1500** is depicted comprising VHR filter **1502**, intra-frame encoder **1504** and inter-frame encoder **1506**, in addition to multiplexer **106** and rate control buffer **108**, each cooperatively coupled as depicted. Except for the teachings of the present invention, encoder **1500** is typical of prior art encoders. In particular, VHR filter **1502** is a low-pass filter that effectively replaces the right-half of a received block of data with all zeroes (see, e.g., **Fig. 7**). Accordingly, the computation resources of the DCT and Quantization phases of frame encoder **1504** are greatly reduced, with minimal impact to decoded video image. In accordance with another aspect of the present invention stemming from the VHR filter **1504**, entropy encoder **1514** employs run-length encoding utilizing the alternate scan pattern, as described above.

In addition to the innovative encoding techniques described above, the inter-frame encoder **1506** utilizes a computationally efficient motion estimator **1508**, which employs the temporally constrained unidirectional B-frame encoding and the even-parity field encoding techniques described above. Moreover the innovative inter-frame encoder **1506** of the present invention does not rely on reconstructed past frames as a reference, but rather utilizes the original frame, thereby eliminating the need for the reconstructing circuitry (e.g., DCT^{-1} , Q^{-1} and Summing stage) and additional storage typical of prior art encoders. In one embodiment, innovative encoder **1500** is implemented on a video board accessory board of a typical home computer system, or as a constituent member of a special purpose video processing station.

In accordance with another embodiment of the present invention, the innovative encoding techniques of the present invention are embodied in software. Accordingly, **Figure 15** illustrates

an example storage medium **1602** having stored thereon machine executable instructions **1604** which, when processed by a controller transforms an appropriately configured machine executing machine executable instructions **1604** into a data encoder incorporating one or more of the innovative aspects of the present invention described above. In accordance with the illustrated example embodiment of **Figure 15**, storage medium **1602** is intended to represent any of a number of alternative storage media including, but not limited to, floppy disks, magnetic tape, compact disk, digital versatile disk, optical disks, and the like. Further, those skilled in the art will appreciate that the machine executable instructions need not be located within the an executing machine itself, but may be accessed from coupled network devices.

Those skilled in the art will appreciate that innovative encoder **1500** may well be embodied in any of a number of different forms. In addition to the embodiments described above, those skilled in the art will appreciate that the teachings of the present invention may well be integrated with a single integrated circuit (not shown). That is, those skilled in the art will appreciate that advances in IC fabrication technology now enable complex systems to be integrated onto a single IC. Thus, in accordance with one embodiment of the present invention, the teachings of the present invention may be practiced within an application specific integrated circuits (ASIC), programmable logic devices (PLD), microcontroller, processor and the like.

Thus, alternative embodiments for a method and apparatus for providing real-time image processing has been described. While the method and apparatus of the present invention has been described in terms of the above illustrated embodiments, those skilled in the art will recognize that the invention is not limited to the embodiments described. Thus, those skilled in the art will appreciate that the present invention can be practiced with modification and alteration

within the spirit and scope of the appended claims. Accordingly, the descriptions thereof are to be regarded as illustrative instead of restrictive on the present invention.

CLAIMS

What is claimed is:

- 1 1. A method for performing motion estimation comprising:
2 receiving a stream of data comprising at least a predicted frame and an anchor frame; and
3 utilizing even-parity field prediction to predict content of each of a plurality of fields of
4 the predicted frame from corresponding fields of the anchor frame.
- 1 2. The method of claim 1, wherein the content of each of the plurality of fields of the
2 predicted frame are predicted merely from a corresponding field of the plurality of fields
3 comprising the anchor frame, scaled by a dynamically determined motion vector.
- 1 3. The method of claim 2, wherein the motion vector is dynamically determined by
2 measuring activity within each of the plurality of fields of the anchor frame.
- 1 4. The method of claim 1, wherein the predicted frame either precedes or supersedes the
2 anchor frame based, at least in part, on the predicted frame type.
- 1 5. The method of claim 1, wherein each of the predicted and anchor frames contain
2 interlaced video content or progressive video content.
- 1 6. The method of claim 5, wherein a first field of the predicted frame and the anchor frame
2 comprises even-field content of the interlaced video content, and a second field of the predicted
3 frame and the anchor frame comprises odd-field content of the interlaced video content.

1 7. The method of claim 5, wherein a first field of the predicted frame comprises even-field
2 content of the interlaced video content and a first field of the anchor frame comprises odd-field
3 content of the interlaced video content.

1 8. The method of claim 5, wherein a first field of the predicted frame comprises odd-field
2 content of the interlaced video content and a first field of the anchor frame comprises even-field
3 content of the interlaced video content.

1 9. The method of claim 1, wherein one or more motion estimation vectors are generated for
2 each of the plurality of fields of the anchor frame by measuring a sum of absolute differences.

1 10. The method of claim 1, wherein even-field interlaced video content of the predicted
2 frame is predicted from even-field interlaced video content of the anchor frame, and odd-field
3 interlaced video content of the predicted frame is predicted from odd-field interlaced video
4 content of the anchor frame.

1 11. The method of claim 10, wherein the even-field interlaced video content of the predicted
2 frame is predicted from the even-field interlaced video content of the anchor frame and a motion
3 vector, wherein the motion vector is determined by measuring a sum of absolute differences
4 within the even-field interlaced video content of the anchor frame.

1 12. An apparatus comprising:
2 a motion estimation circuit to receive a stream of data comprising at least an anchor frame
3 and a predicted frame, and to utilize even-parity field prediction to predict content of each of a
4 plurality of fields of the predicted frame from corresponding fields of the anchor frame.

13. The apparatus of claim 12, wherein the anchor frame used either precede or supersede the predicted frame depending on predicted frame type.

14. The apparatus of claim 12, wherein the motion estimation circuit measures activity content within each of the plurality of fields of the anchor frame to generate a corresponding plurality of motion vectors.

15. The apparatus of claim 14, wherein the motion estimation circuit predicts content of a first in the predicted frame from content of a corresponding first field in the anchor frame and a first field motion vector, and predicts content of a second field in the predicted frame from a corresponding second field and a second field motion vector.

16. The apparatus of claim 12, wherein the predicted frame and anchor frame are comprised of interlaced video content, wherein a first field of each of the predicted frame and the anchor frame contain even-field interlaced video content, while a second field of each of the predicted frame and the anchor frame contain odd-field interlaced video content.

17. The apparatus of claim 12, wherein motion estimation circuit generates a motion vector for each of a first and second field of the predicted frame by measuring a sum of absolute activity differences in a corresponding first and second field of the anchor frame.

18. A storage medium comprising a plurality of executable instructions which, when executed, causes an executing processor to implement a motion estimation function to utilize even-parity field prediction to predict content of each of a plurality of fields of a predicted frame from corresponding fields of one or more anchor frames.

1 19. The storage medium of claim 18, wherein the motion estimation function generates a
2 motion vector associated with each of the plurality of fields of the predicted frame based, at least
3 in part, on a sum of absolute activity differences within each of the plurality of fields of the
4 anchor frame.

652230 " 652230 " 652230 " 652230 " 652230 "

Life Cycle

5

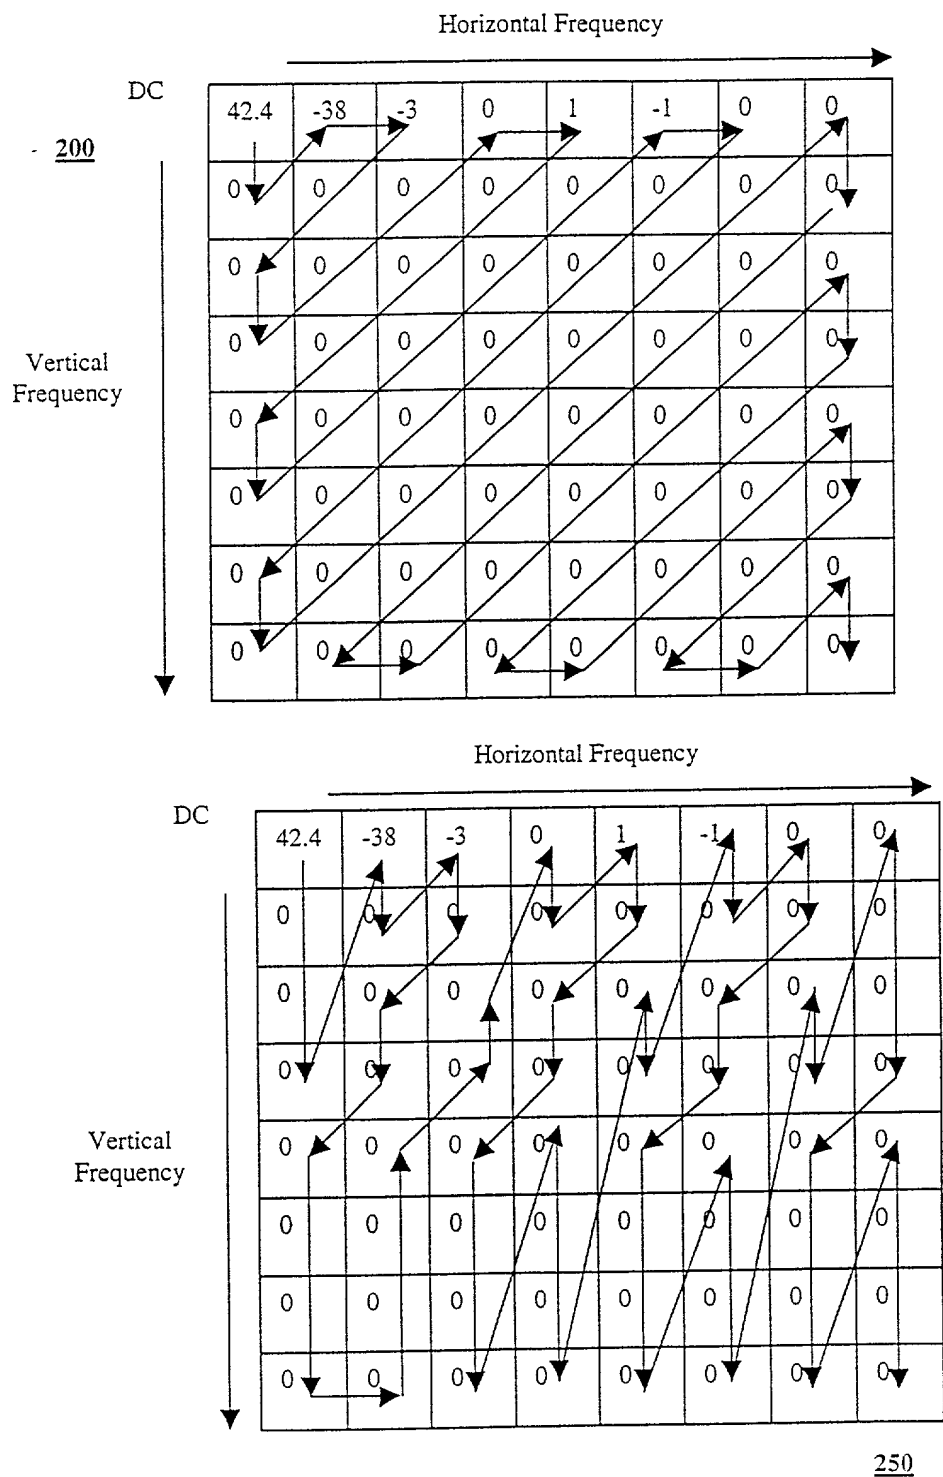


Fig. 2: Prior Art

FIG. 3

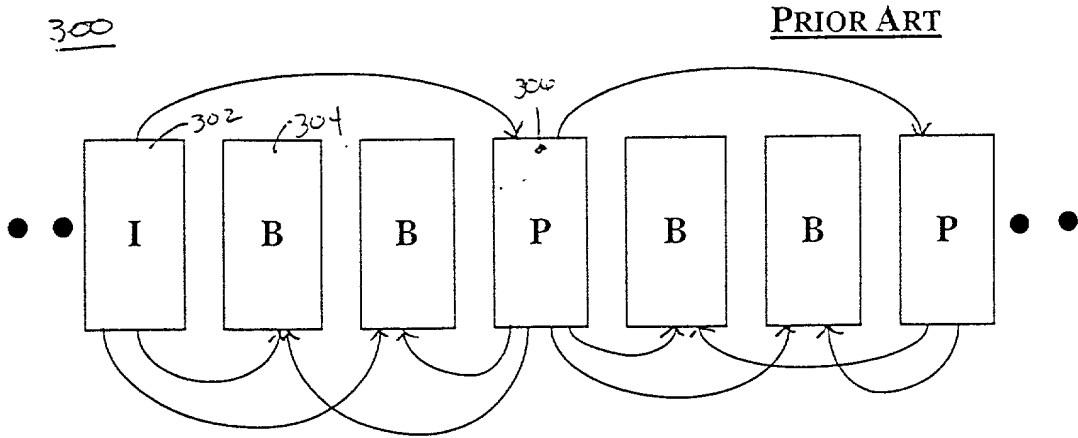


FIG. 4


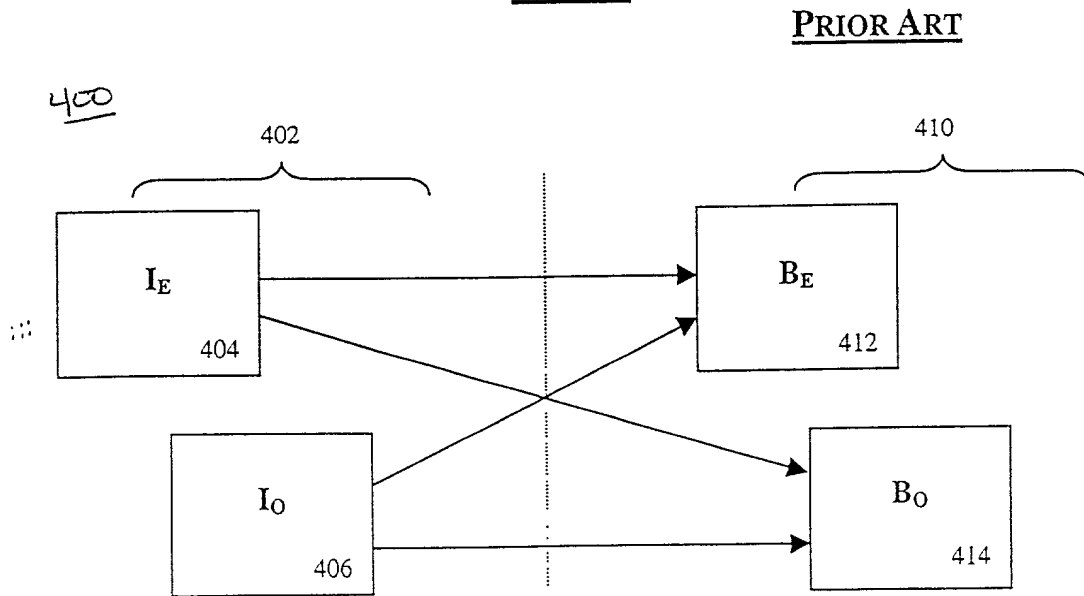


FIG. 5

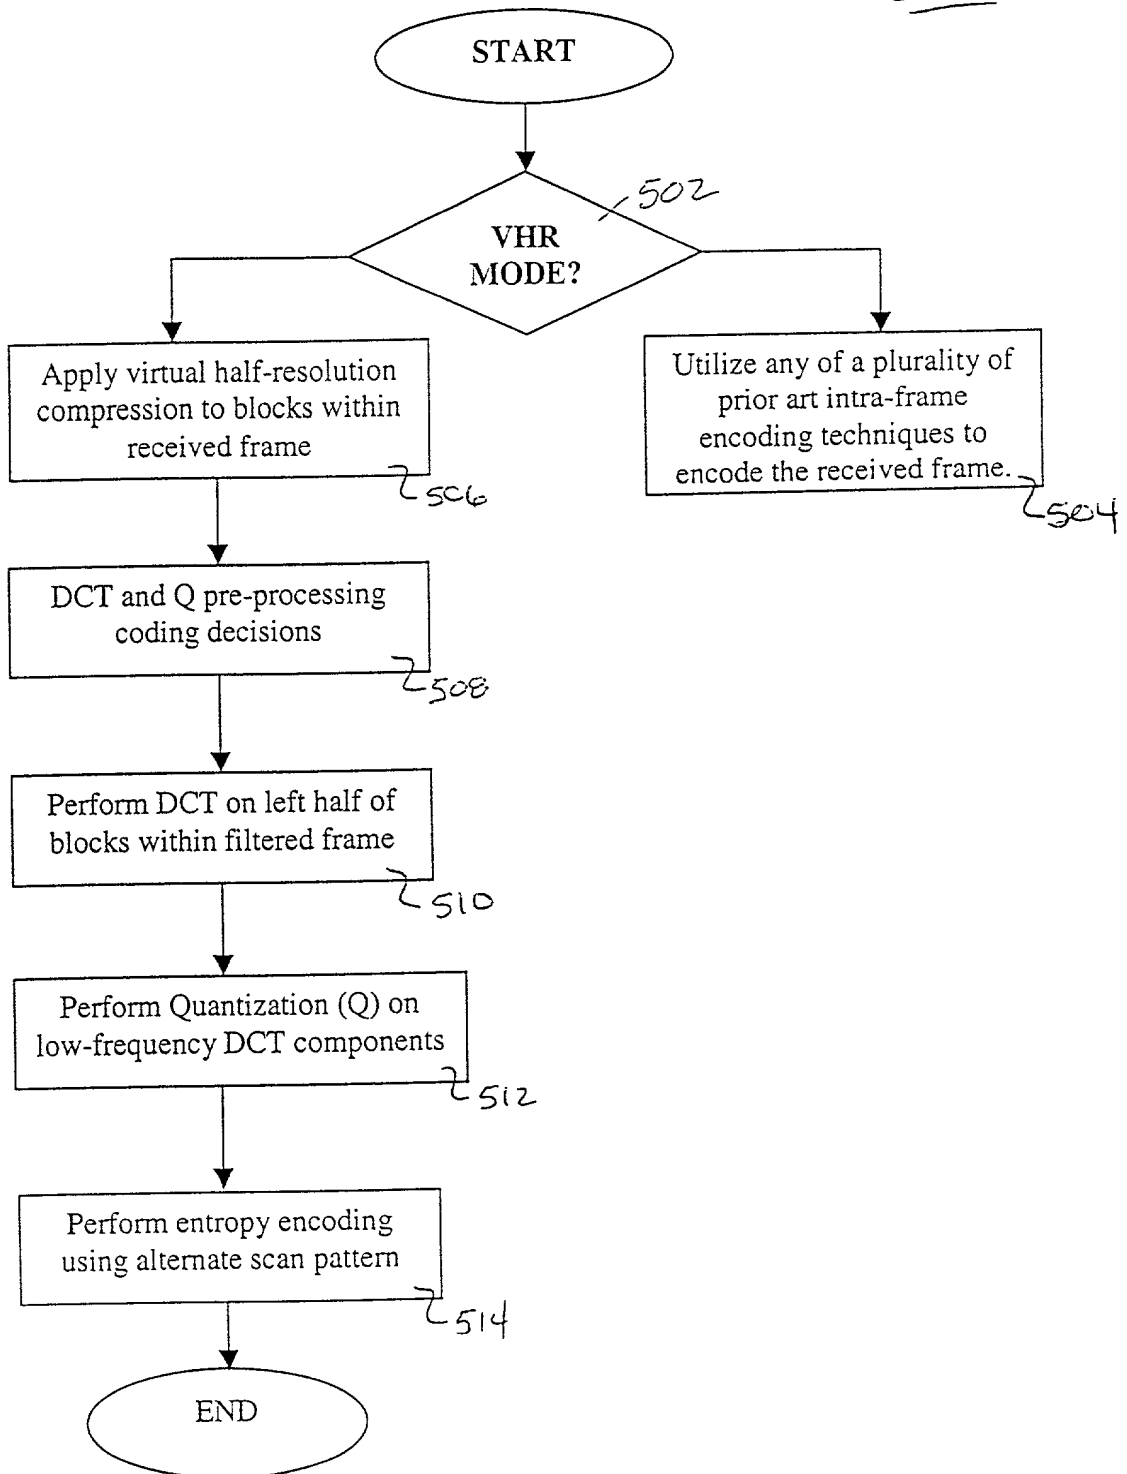


[illegible]

FIG. 7

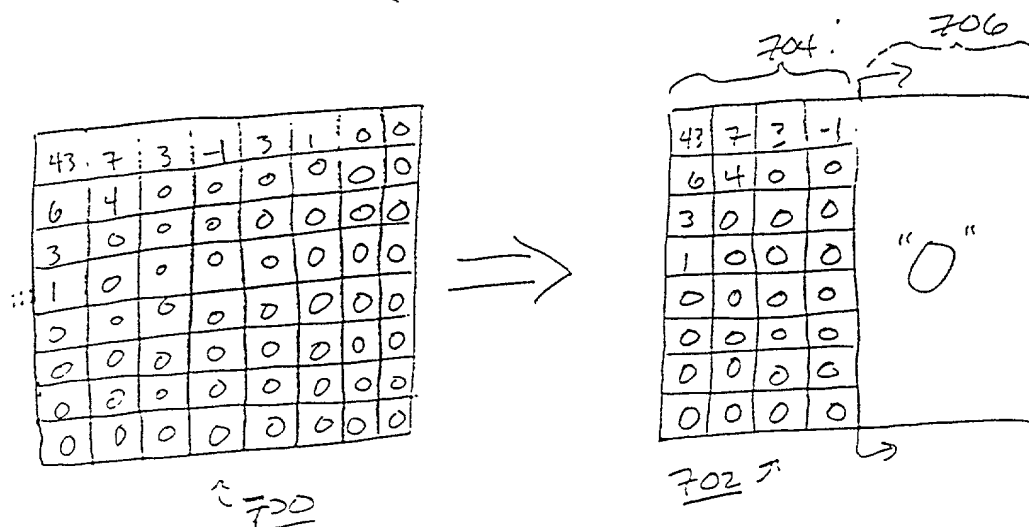


FIG. 8

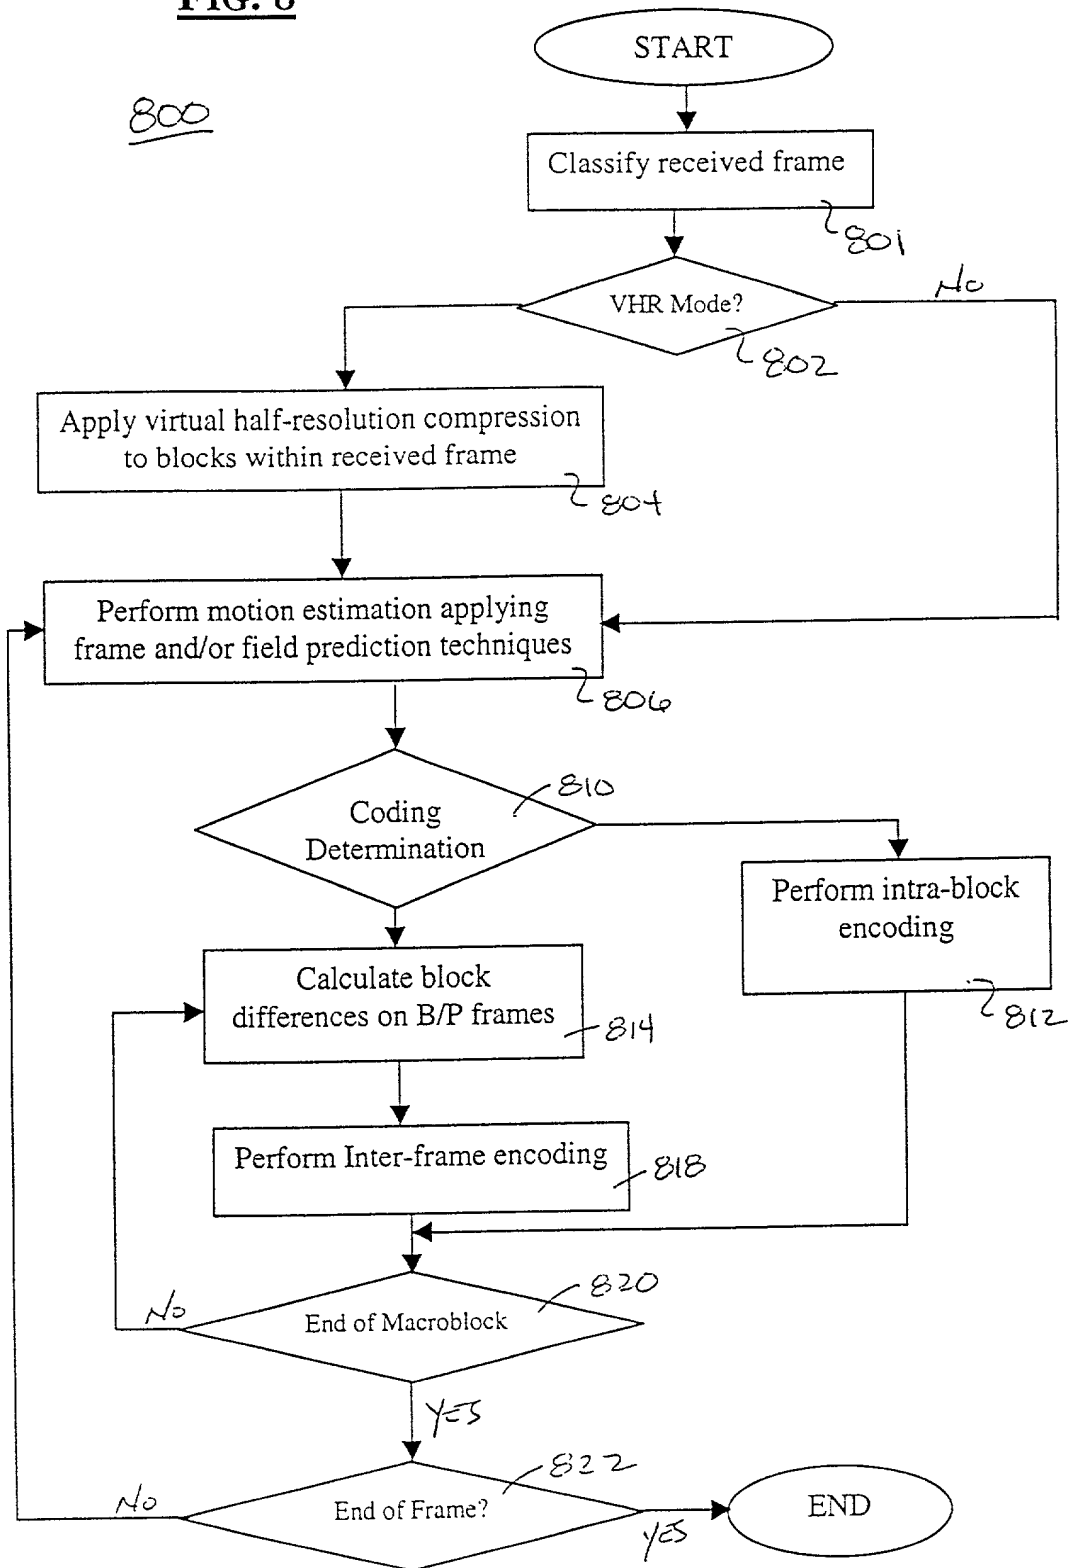


FIG. 9

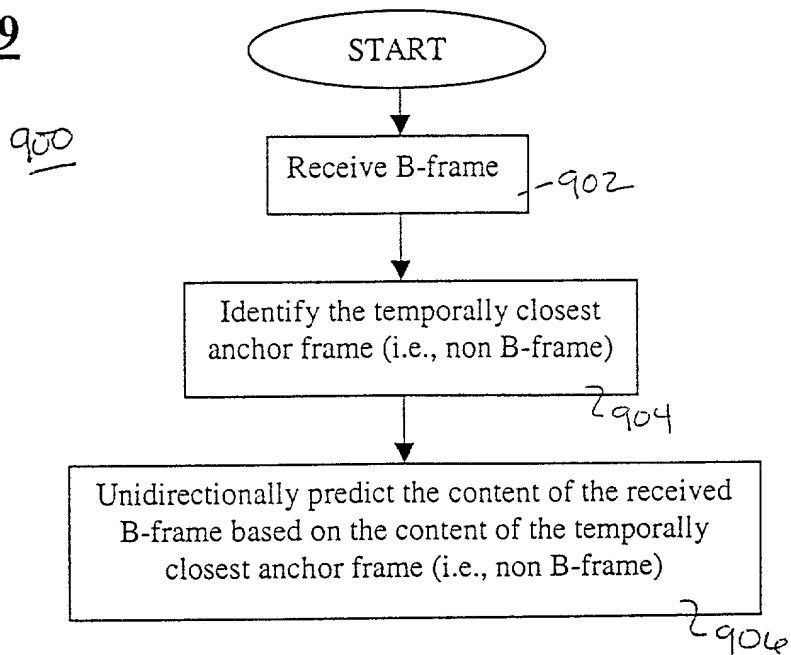


FIG. 11

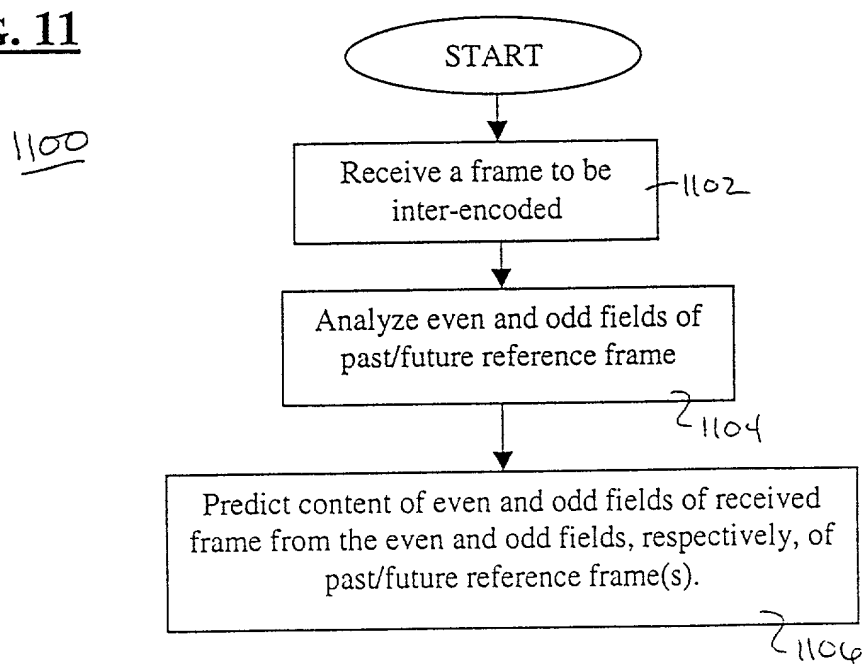


FIG. 10


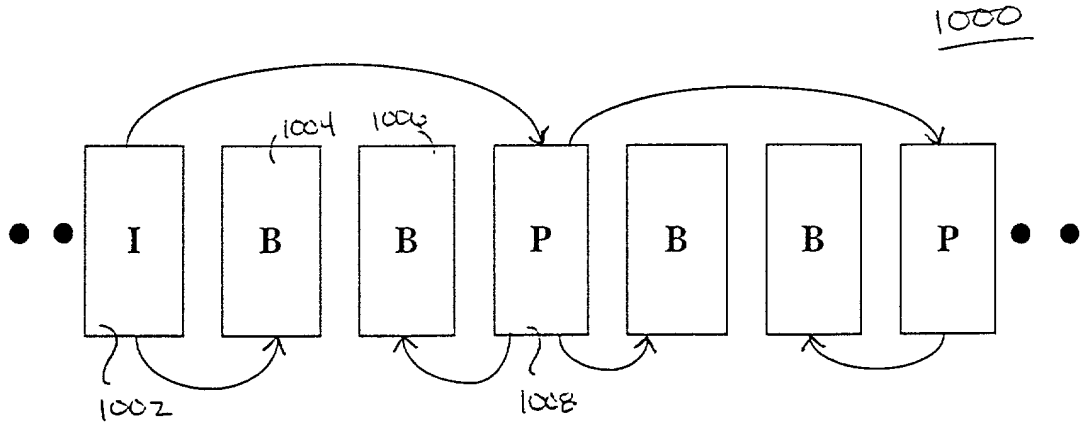


Fig. 12

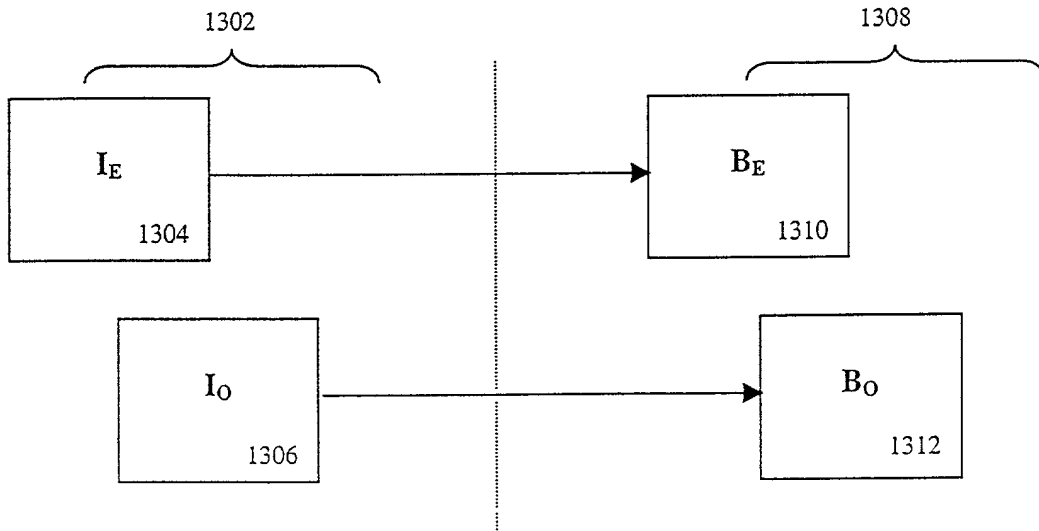

1300

66221E0" 23142260

FIG. 13

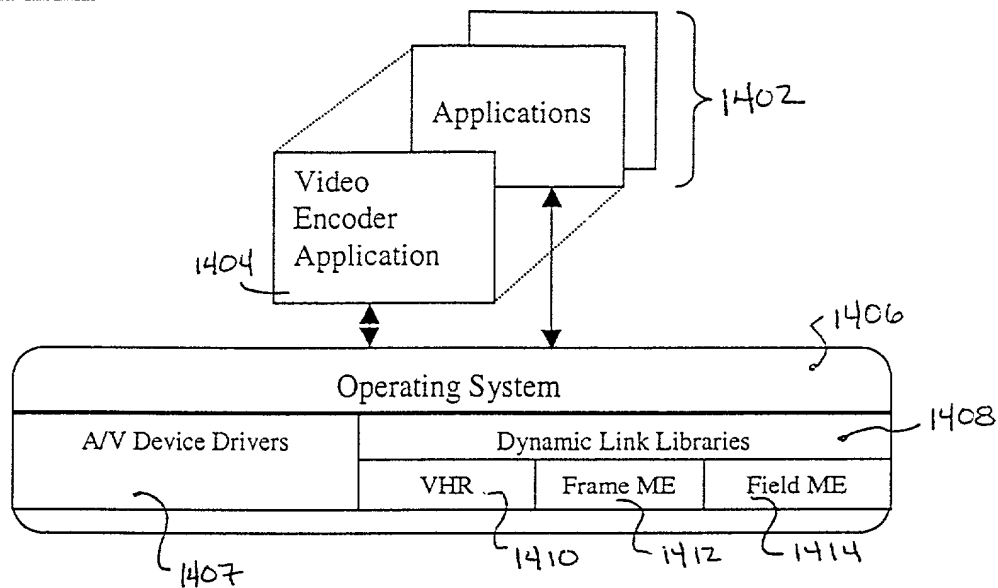
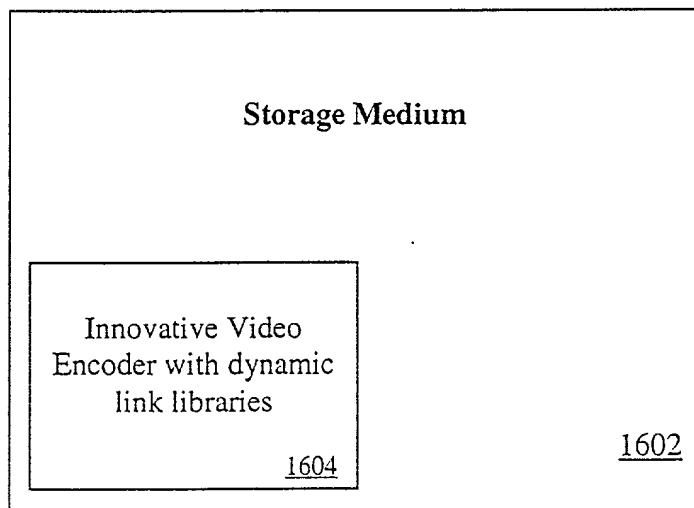


FIG. 15



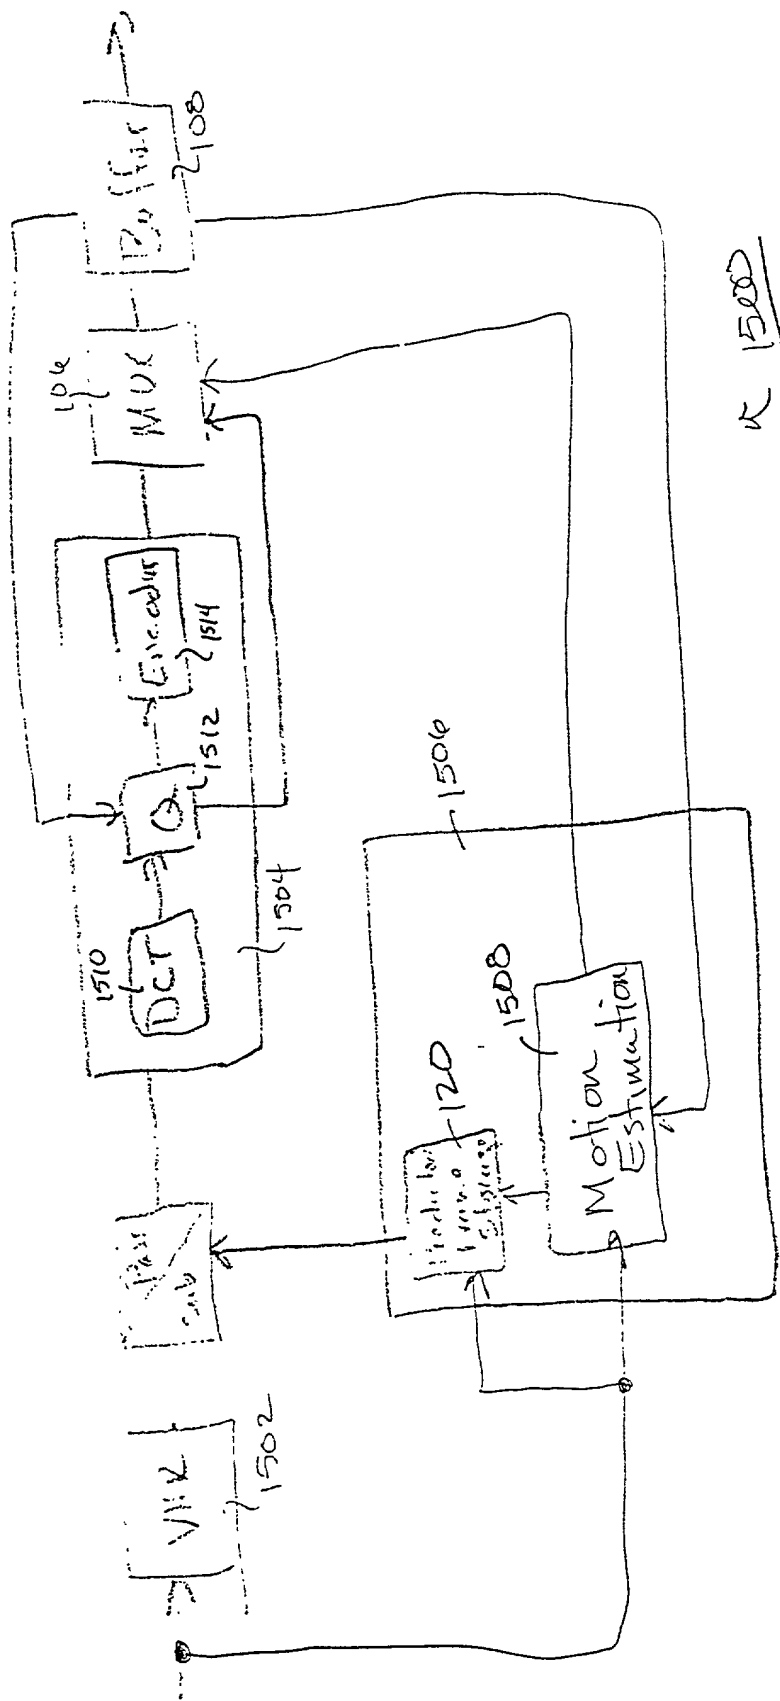


FIG. 14

Attorney's Docket No.: 42390.P7110

PATENT

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION
(FOR INTEL CORPORATION PATENT APPLICATIONS)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Method and Apparatus for Simplifying Field Prediction Motion Estimation

the specification of which

X is attached hereto.
_____ was filed on _____ as
United States Application Number _____
or PCT International Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>			<u>Priority Claimed</u>	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	Yes	No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	Yes	No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	Yes	No

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

(Application Number)

Filing Date

(Application Number)	Filing Date	(Status -- patented, pending, abandoned)
----------------------	-------------	--

INTEL CORPORATION

Send correspondence to Michael A. Proksch,

(Name of Attorney or Agent)

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, 12400 Wilshire Boulevard, 7th Floor, Los Angeles,
California 90025 and direct telephone calls to Michael A. Proksch, (503)684-6200.

(Name of Attorney or Agent)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor Jeffrey S. McVeigh

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
(City, State) (Country)

Post Office Address _____

Full Name of Second Inventor Michael Keith

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
(City, State) (Country)

Post Office Address _____
